



**WACKER
NEUSON**
all it takes!

BS50-4As, BS60-4As

4 Stroke Rammer



4 stroke rammer: Long service life and low oil consumption


Wacker Neuson's 4 stroke rammers are classified by an excellent performance which is sustainably convincing. The high stroke energy, high percussion rate and long shoe stroke combined with a fast advance travel achieve excellent compaction results. Well thought-out features make the use of the 4 stroke rammers even more user-friendly, extend the service life and reduce maintenance to a minimum.

- Fast starting due to a small pump to the carburetor
- Strong stroke for heavy, cohesive soils
- Integrated oil deficiency protection with automatic shutdown when the engine is started with insufficient oil level
- Premium air filter ensures an almost dust-free engine operation and provides three times longer change intervals



Comfortable transport

- Large and flexible transport lug
- Easy loading and stowing by transport rollers on the handle

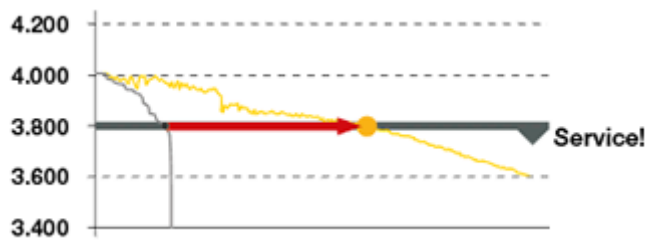


1/min (rotation) / Operating hours



Innovative air filter system

- Operate three times longer in the optimum speed range than without compensation
- Three times longer service intervals

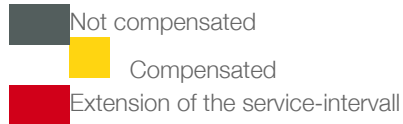

An engine with a strong reserve

The robust GXR 120 engine from Honda operates in normal operation well below its performance limit. This protects the engine and extends its service life.



**WACKER
NEUSON**
all it takes!



Comfortable operation

- Only one lever for idling, starting and stopping



Technical specifications

	BS50-4As	BS60-4As
Operating data		
Operating weight kg	65	72
Ramming shoe size (WxL) mm	280 x 340	280 x 340
L x W x H mm	673 x 343 x 940	673 x 343 x 965
Percussion rate max. blows/min	656	656
Stroke at the ramming shoe mm	61	65
Impact force kN	16	18
Operating speed m/min	7.1	8.8
Surface capacity - Compaction m ² /h	119	148
Engine / Motor		
Engine / Motor type	GXR 120	GXR 120
Engine / Motor manufacturer	Honda	Honda
Engine / Motor	Air-cooled single-cylinder four-cycle gasoline engine	Air-cooled single-cylinder four-cycle gasoline engine
Displacement cm ³	121	120
Rated performance (DIN ISO 3046-1) kW	2.7	2.7
at rpm rpm	4,100	4,100
Fuel consumption l/h	1	1
Fuel tank capacity l	2.9	2.9

Please note

that product availability can vary from country to country. It is possible that information / products may not be available in your country. More detailed information on engine power can be found in the operator's manual; the stated power may vary due to specific operating conditions.

Subject to alterations and errors excepted. Applicable also to illustrations.

Copyright © 2018 Wacker Neuson SE.